


# IHOR Setup Instructions

## Measurement Instructions:

1. Begin by placing left start pole at least 60' from end wall and 15' from left wall.  
Set right starting pole 30' from left pole
2. From left starting pole measure straight up and set gaming poles with 8' between bases  
There should be 8' clear space between rubber bases
3. From the final gaming pole measure 9' and place left end of trot over pole. Measure 3' of clear space and set the second trot over pole. Set the remaining poles of the fan
4. From the right end of the second trot over pole measure 3' to the right and place the tipping bridge pole  
place bridge on top of pole
5. The tipping bridge is a standard bridge with a notch cut in the center underneath where it rests on the pole. It should be reinforced on this notch to withstand the weight of horse and handler. The pole/log that it rests on should be large enough in diameter so that once bridge is placed, one side of bridge will be touching the ground and the other side is approximately 4"-8" off of ground. Pole should not be too small or too large that bridge rolls when stepped on.
6. From the bottom center edge of the bridge, measure down 11' and place the top center edge of the first barrel
7. Stretch tape between 1st and 3rd barrels (should be 7'). At the 36" mark measure 8' to the right and place left edge of second barrel

Note: All measurements are inside edge to inside edge creating free space in the amount designated

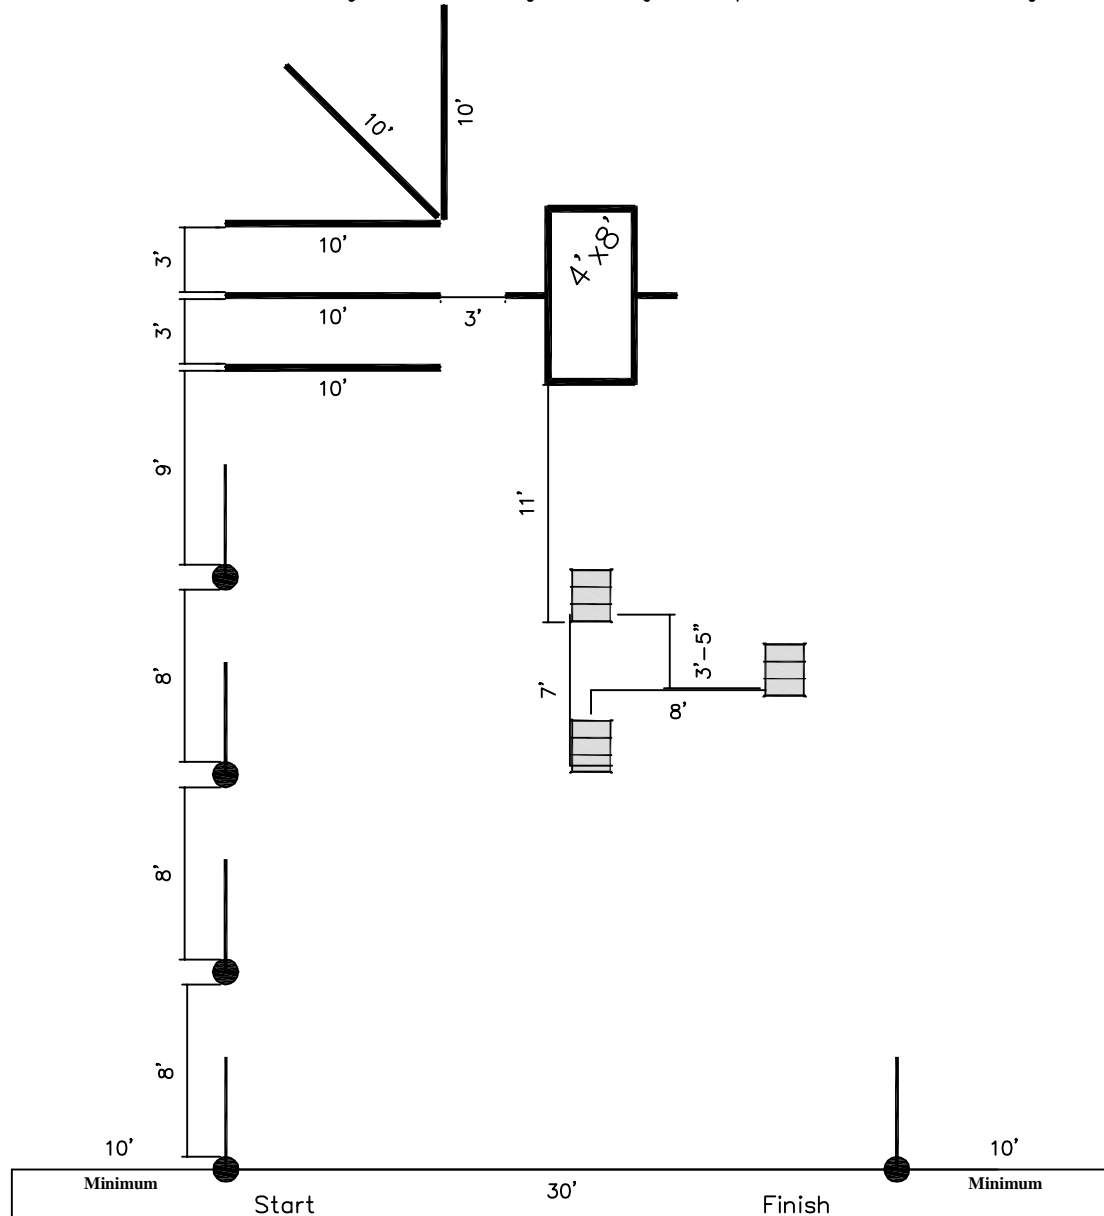

**OHSET  
STATE  
PATTERN #2  
In Hand Obstacle Relay  
(I.H.O.R.)**  
#2.15.19 Revised 4-21-19

Equipment List:
(5) Gaming poles
(5) 10' poles
(1) Approx. 8' pole or log (under bridge)
(3) Barrels
(1) Teeter Totter bridge, 4'x8' (min 4'x6')